

CASELLA HY-TURB XS 63/300





FEATURES:

- Heavy duty design
- Hot dip galvanised chassis
- Travel shut-off mechanism
- Highly efficient turbine
- 4-speed Italian made gear box: By adjusting the most efficient turbine rotation and speed, you can save energy.
- Manual speed control
- 270° Manual Rotation of Upper Frame
- Hydraulic lifting of the sprinkler trolley
- Trolley with 3 rubber wheels
- Flexible Hose Ø63 for Water Inlet
- Tyres: 10.0 / 80-12
- Joint for PTO drive shaft
- Comes with Ducar Jet 50 Sprinkler Head
- Excellent Water Uniformity
- Long Life & Simple Maintenance: The units are built from long life components and require a minimum of maintenance. Spare parts and backup service available.
- Made in Italy

- Hose Length: 300 m
- Hose Diameter: 63 mm
- Hose Thickness: 5.2 mm
- Working Pressure: 60 90 psi
- Water Flow: 200 400 l/min
- Effective Spray Width (Diameter): 60 70 m
- Total Irrigated Area: 330 X 420 m = 138,600 m² (13.8 Hectare) in 7 days
- Sprinkler: DuCaR Jet 50
- Weight: 1440 kg
- Mechanism: 4-speed Gear Box directly integrated to turbine
- Rewind Speed: Manual Valve

APPLICATIONS:

- Agriculture: Small to medium crops, pastures, and dairy farms
- Turf Irrigation: Golf, race/horse courses, playing/sports fields and gardens
- Dust Control: Mining and construction sites



CASELLA HY-TURB XS 63/300












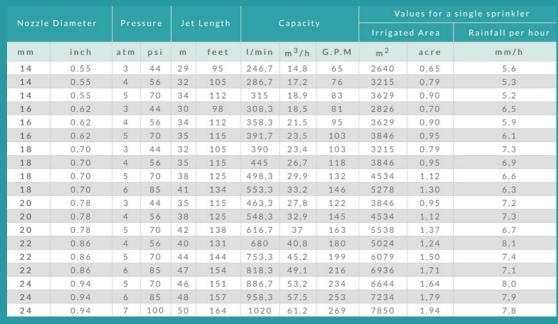



Casella Turbine





12/49 Jijaws Street Sumner QLD 4074 (07) 3088 8096

> sales@irrigationbox.com.au www.irrigationbox.com.au